




SB-Series

Specification Chart

SB-Series: This series is slightly darker than the standard series. The SB-Series eye wear would typically be used by the soft glass or clear borosilicate glass lampworker. It is also excellent for kiln work and glassblowing. Sodium Flare, UV and IR Protection.

SB - Luminous Transmittance: 15%

λ [nm]	L-Rating	λ [nm]	OD
	Pending	190–400	5+
		575–595	2+
		580–590	2+
		800–1800	.5+
		880–1100	1+

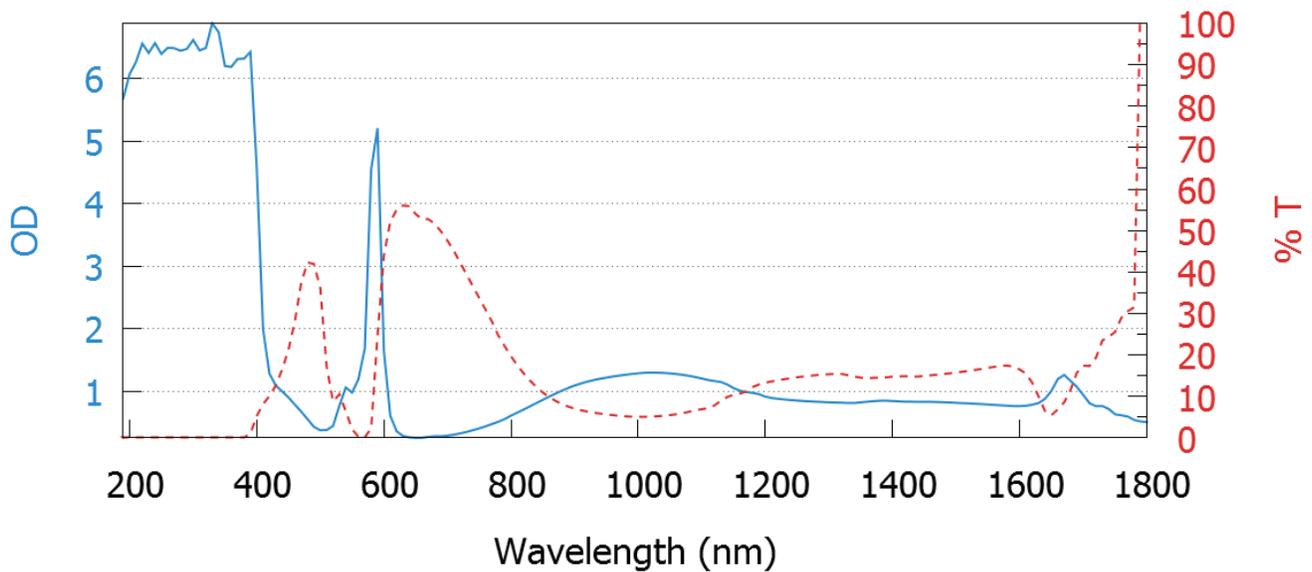




S-Series

Specification Chart

S-Series: This series would typically be used by the soft glass beadmaker and lampworker. Sodium Flare and UV Protection.

S - Luminous Transmittance: 26%

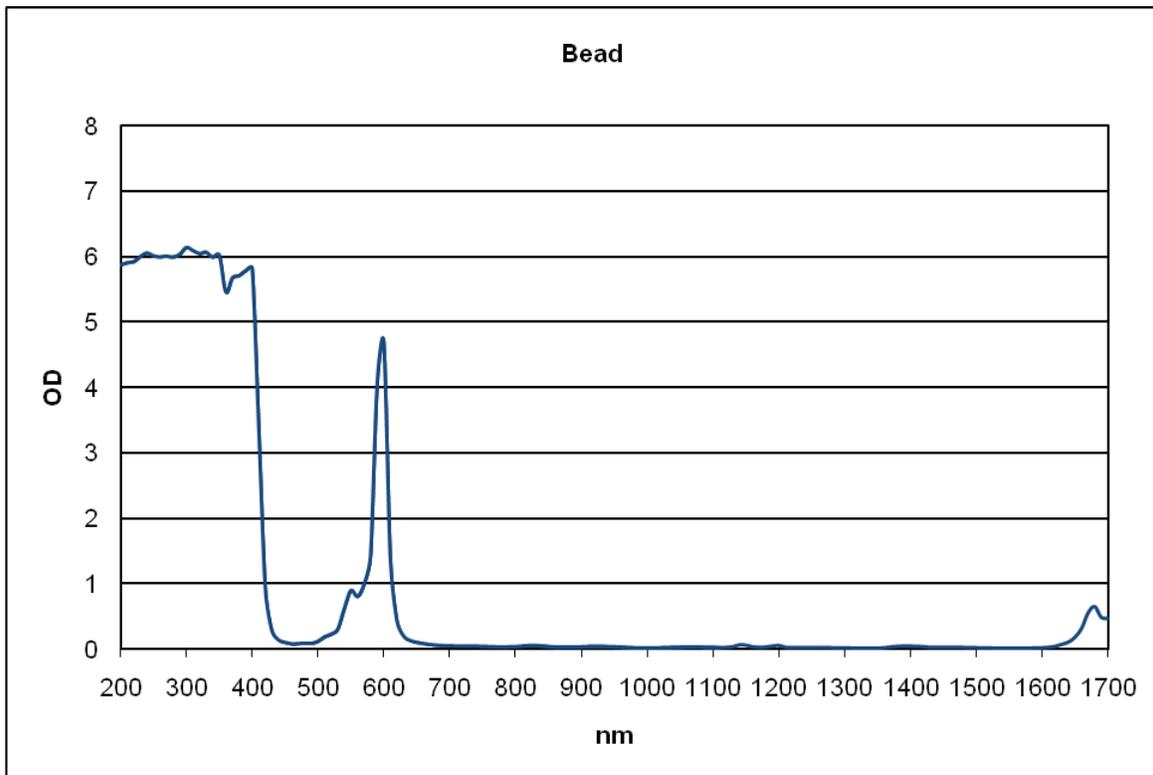



B3-Series

Specification Chart

B3-Series: This series features the same benefits as the SBS Series with the addition of a welder's shade #3 for additional brightness reduction. Sodium Flare, UV and IR protection.

B3 - Luminous Transmittance: 2%

